




NTN Bearing de Mexico, S.A.

20 mm x 47 mm x 25 mm SKF NATV 20 PPA Cam Follower and Track Roller - Yoke Type

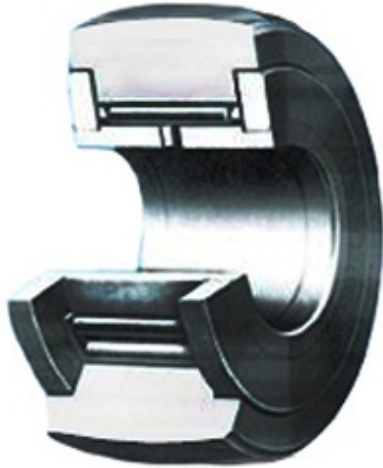

NATV 20 PPA Bearing 2D drawings and 3D CAD models

Bearing No. NATV 20 PPA

| | |
|------------------------|---|
| Category | Cam Follower and Track Roller - Yoke Type |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |
| Weight | 0.25 |
| EAN | 7316571592626 |
| Product Group | B04120 |
| Roller Surface Profile | Crowned |
| Profile | Yoke Type |
| Enclosure | Sealed |
| Rolling Element | Needle Bearing |
| Relubricatable | Yes |
| Inch - Metric | Metric |
| Other Features | Full Complement With Flanged Inner Ring 3 Stage Sealing |
| Long Description | 20MM Bore; 47MM Roller Diameter; 24MM Roller Width; Crowned Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable |
| Category | Cam Followers Yoke Type |
| UNSPSC | 31171530 |
| Harmonized Tariff Code | 8482.40.00.00 |
| Noun | Bearing |
| Keyword String | Cam Follower |
| Manufacturer URL | http://www.skf.com |



NTN Bearing de Mexico, S.A.

| | |
|--|----------------------------|
| Manufacturer Item Number | NATV 20 PPA |
| Weight / LBS | 0.551 |
| Roller Diameter | 1.85 Inch 47 Millimeter |
| Roller Width | 0.945 Inch 24 Millimeter |
| d | 0.787 Inch 20 Millimeter |
| D | 47 mm |
| d | 20 mm |
| C | 24 mm |
| B | 25 mm |
| d ₁ | 36.5 mm |
| r _{1,2} min. | 1 mm |
| Basic dynamic load rating C | 19.4 kN |
| Basic static load rating C ₀ | 41.5 kN |
| Fatigue load limit P _u | 5 kN |
| Maximum dynamic radial loads F _r max. | 30.5 kN |
| Maximum static radial loads F _{0r} max. | 43 kN |
| Limiting speed | 1900 r/min |
| Mass support roller | 0.24 kg |